

# SUNFIRE<sup>®</sup>

HEATS UP TO 3,500 SQ. FT.


**SF150**  
RADIANT HEATER  
150,000 BTUs




**LOW NOISE**



**ODORLESS**



**NEAR ZERO  
CO EMISSIONS**



**DUST FREE  
EXPERIENCE**



**THERMOSTAT CONTROL OPTION**  
CONNECT TO STANDARD WALL THERMOSTAT  
(THERMOSTAT NOT INCLUDED)

**RUNS ON DIESEL OR #2 FUEL OIL**  
REQUIRES 120V OF ELECTRICITY.

**HEAVY-DUTY, POWERFUL  
& PORTABLE.**



# THE ULTIMATE HEATING EXPERIENCE

## OUTPERFORMS FORCED AIR HEATERS

### FORCED AIR

#### THE PROBLEM

- ✗ EXTREMELY LOUD
- ✗ STRONG ODOR
- ✗ SHORTER RUN TIMES
- ✗ HEATS AIR, NOT OBJECTS

### SUNFIRE RADIANT

#### THE SOLUTION

- ✓ LOW NOISE
- ✓ VIRTUALLY ODORLESS
- ✓ LONG RUN TIMES
- ✓ HEATS OBJECTS DIRECTLY

Near Zero (CO)  
Emissions




Heats 3,500 sq. ft.  
Of Indoor Space



Optional Use With  
Wall Thermostat



Heavy-Duty Steel  
Construction

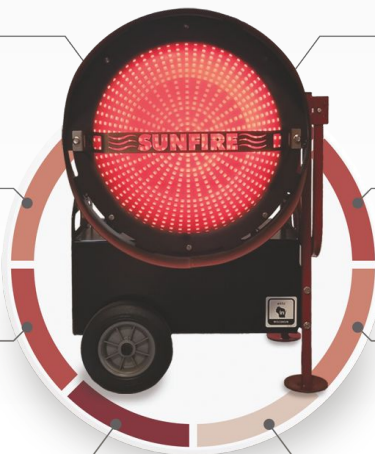

**MADE IN  
USA**



Low Noise &  
Virtually Odorless



Includes Tip Over  
Switch For Safety



Heated Filter For  
Subzero Startup



Dust Free Heating  
Experience

\* Requires proper ventilation when used indoors. Not for household residential use.

## SPECIFICATIONS

BTU/Hr:	High: 150,000 (43kW) Low: 130,000 (38kW)	Weight:	Empty Tank: 195 lbs. Full Tank: 320 lbs.	<b>Thermostat Options:</b>  Use any mechanical or battery operated wall thermostat. Do not use a thermostat that requires 120V of electricity to operate.  <i>Thermostat not included. See manual for quick installation.</i>
Fuel:	Types: Diesel, #2 Fuel Oil Tank Capacity: 19 Gallons	Product Dimensions:	29"W x 35"L x 41"H 73.7cm x 88.9cm x 104.1cm	
Flow Rate:	High: 1.10 GPH Low: .97 GPH	Run Time:	High: 17 Hrs Low: 19 Hrs	
Electrical Requirements:	120V 2A 60HZ Or 12V Pure Sine Inverter (800W Min)	Minimum Clearances: <i>Keep away from combustible items.</i>	Front: 72" Sides: 36" Back: N/A	

**SUNFIRE**



SunFireHeaters.com